



Roll

Pio&amp;Titotoso

colors



Typology Wall  
Utilisation Indoor

230V 17.4 W 2460 lm



indirect light

The structure, with its essential and fluid design, gently wraps and protects the light source thanks to its twisting, generating a dynamic effect. The light, coming from an LED source, is hidden behind an opalescent diffuser that softens its intensity, diffusing it in the environment in a delicate and refined way. The result is a lamp with indirect light that illuminates the surrounding space and contributes to generating an intimate and relaxing atmosphere.


Aluminium wall lamp with indirect LED light.



Family	Roll
Typology	Wall
Utilisation	Indoor

### Dimensions

Height	10 cm
Profondità	10 cm
Lunghezza	45 cm

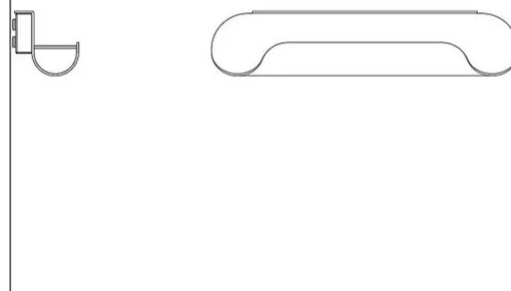

### Materials

Structure	aluminium	Riflettore	aluminium
Base	aluminium		


Voltage	230V	Watt	17,4 W
Power unit	Included	Lumen	2460 lm
Mounting Power Supply	In the lamp body	Duration	50000 h
Power supply	Electronic power supply	CCT	2700 K
		Energy class	

### Certifications

EcoLabel

### Photometric curves

WALL 19W LED 2700K 1465 ROLL 22W 2683K 17.4W LED 2700K

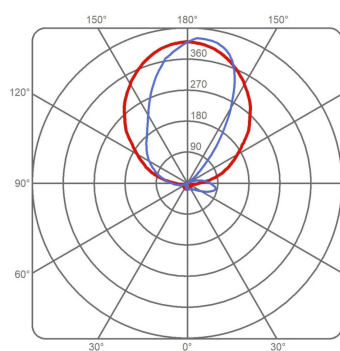

$I_{max}$  422 cd/klm



## Colour variant code

1465/DIM/2700/GI



1465/DIM/2700/MR



Copper  
Brown

1465/DIM/2700/BI



White

## Gallery



